



LKV-T02

2-port Super Mini Desktop KVM Switch w/ 2 x built-in 1.5M KVM Cables

Quick Installation Guide

Thank you for purchasing the **LKV-T02 Super Mini Desktop KVM Switch**! With our highly reliable and quality product, user can enjoy countless benefits from using it.



Introduction

The **LKV-T02 Super Mini Desktop KVM Switch** is a 2-port PS/2 type KVM Switch that comes with two sets of built-in 1.5M cables to save you cabling troubles. It enables the users to access, control, boot and reboot two computers using only one keyboard, video and mouse.

Its one-piece design of KVM Switch and cabling accessories offers more portability and convenience to KVM Switch users who want to save cabling troubles.

Though compact and integrated in one-piece design, you can nevertheless expect every function of a decent KVM Switch from LKV-T02. It is your best desktop partner for KVM switching in the office or at home.

Before you install

The default setting of the **LKV-T02 Super Mini Desktop KVM Switch** is appropriate for most systems. In fact, you

do not have to make any configuration before installation. It's a Plug-and-Play device: Just connect keyboard, monitor and mouse to the KVM Switch, and then connect the KVM cables to connectors on your computers, and then boot up the computer one at a time and you can start to switch between the two computers.

For a quick start on installation and operation, please follow the instructions below.

The correct setup sequence is

- (1) **Connect the shared keyboard, monitor and mouse to the KVM Switch first, and then connect each set of built-in cable to a computer.**
- (2) **Power up your one connected computer at a time ...**
Since the KVM Switch receives power from the computer's PS/2 interface, it is powered up when you connect the KVM cables to a PC.


Out-of-the-box Installation

Take the Super Mini Desktop KVM Switch out of the box and begin installation....

Before connecting any cable to your KVM Switch, please make sure all of your computers and their peripherals have been powered off. Otherwise, the KVM Switch might not be set up properly.

- Step 1.** Make sure all the computers that are to be connected to the KVM Switch and their peripherals are in powered-off state. If not, power them off before you proceed with the following steps.
- Step 2.** Connect the shared keyboard, monitor and mouse each to its ports on your KVM switch.
- Step 3.** Connect each set of the built-in KVM cable to a computer's keyboard, video and mouse ports. You can use individual standard keyboard, mouse and video cables to extend the cable distance, but depends on the type of the cables you use, the maximum cable distance is limited to 5 ~ 7 meters (15.5 ~ 23 feet).
- Step 4.** Power up the connected computers one at a time. After all your computers are powered up, the keyboard and mouse will be recognized and now you can begin operating the KVM switch.

DO NOT TRY to connect the built-in KVM cables to the computers while the computers are still in powered-on states. Otherwise, the computer will have difficulty recognizing your shared keyboard and mouse.

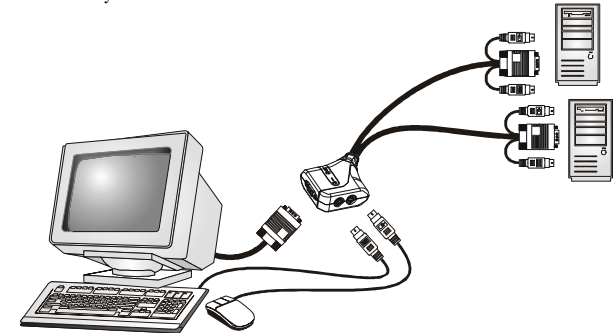

Easy Operation

To select a specific computer, you can use *hotkey commands*.

Keyboard Hotkeys

A keyboard hotkey sequence consists of three specific keystrokes: [See Quick Reference Sheet](#)

Hotkey sequence = ScrLk + ScrLk + Command key

The two consecutive ScrLk keystrokes should be pressed within 2 seconds and the following command key(s) should also be pressed within 2 seconds in likewise manner. Otherwise, the hotkey sequence will not be validated.

For detailed Hotkey sequences and their corresponding functions, please refer to the Quick reference sheet.

System Requirements

| Model Number | LKV-T02 |
|--------------|---|
| PC Side | No extra cables required (using the built-in 1.5M KVM Combo Cable) |
| Console Side | 1 x PS/2 Keyboard 1 x PS/2 Mouse 1 x Monitor |

Quick Reference Sheet

| QUICK REFERENCE SHEET for LKV-T02 KVM Switch Operation Hotkey Commands | | |
|---|---|--|
| Command | Hotkeys | Description |
| Select PC | ScrLk + ScrLk + (x) ¹ (x is a top-row number key) x = 1 ~ 2 for PC channel number | Select the active channel |
| Next lower channel | ScrLk + ScrLk + ↑ (arrow up) | Select the next lower connected channel |
| Next higher channel | ScrLk + ScrLk + ↓ (arrow down) | Select the next higher connected channel |
| Reset Console Mouse | ScrLk + ScrLk + End | Reset mouse on the console side |
| Autoscan | ScrLk + ScrLk + S | Autoscan through every connected channel for quick screen browsing of each channel (default 5 seconds) |
| Stop Autoscan | <i>Any key on keyboard</i> | Terminate Autoscan activity |

Notes:

¹ Note that x denotes a number key for the selected port number. (x = 1 or 2). Use only the number keys on the upper row of the keyboard.

Hotkey convention: The hotkey notation **ScrLk** + **ScrLk** + **(key)** denotes that you should hit the individual key consecutively one at a time, not simultaneously.